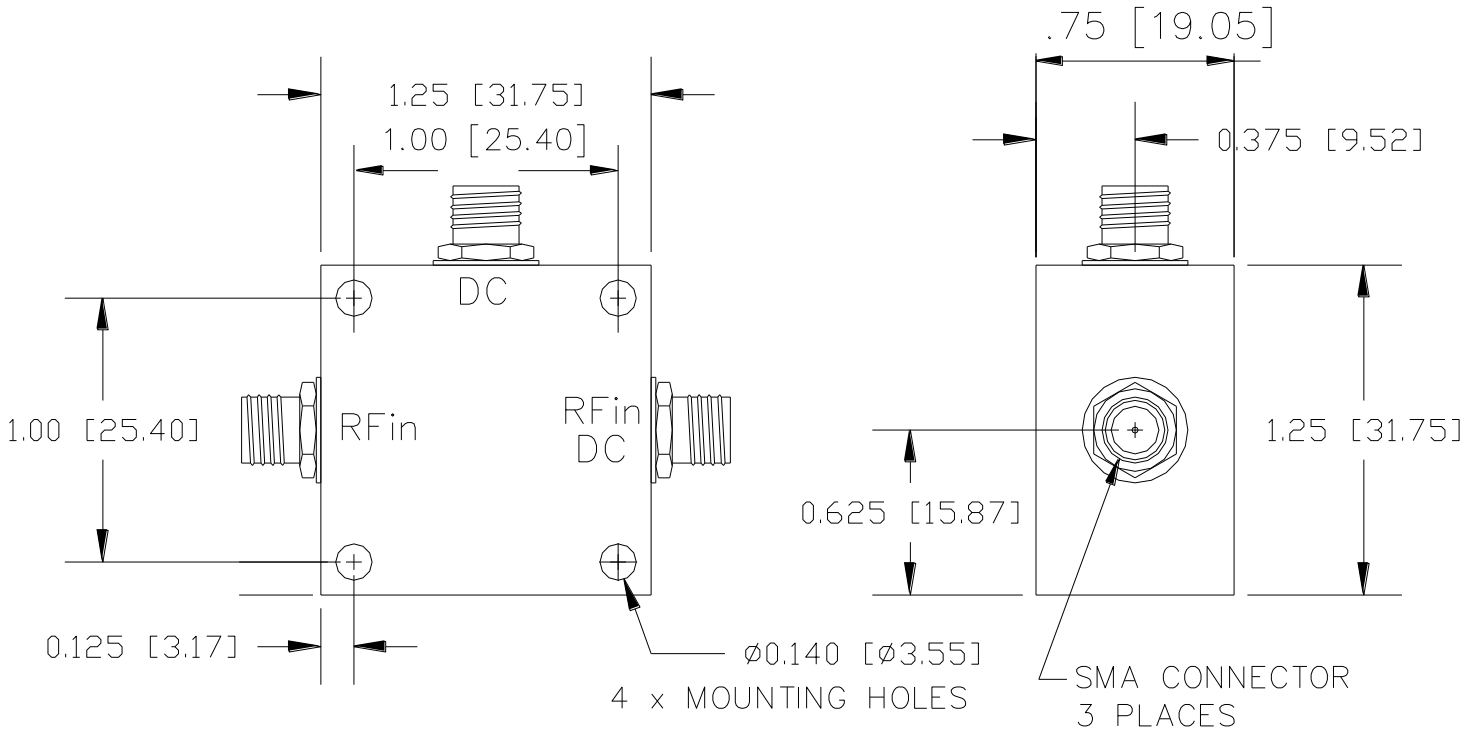


## Electrical Specifications:

| | | | |
|---|---|---|---|
| Frequency Range: | 950-1750 | Mhz | |
| Insertion Loss: | 0.5 | dB | Max |
| Isolation: | 23 | dB | Min |
| Current Amps: | 4.0 | Amp | Max |
| VSWR Input: | 1.40:1 | | Max |
| Vdc: | 100 | Vdc | Max |
| Operating Temp. | -25°C to + 80°C | | |
| Storage Temp. | -55°C to + 125°C | | |

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470
Ph: 973-706-8475, Fax: 973-832-4435
www.sigatek.com

SB23A2

Bias Tee

Dimensions are in inches and (mm)
Decimal Tolerance:
2 place +- 0.020
3 place +- 0.010

**CAGE CODE : 69UC1**

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing in not allowed without Sigatek's approval.