


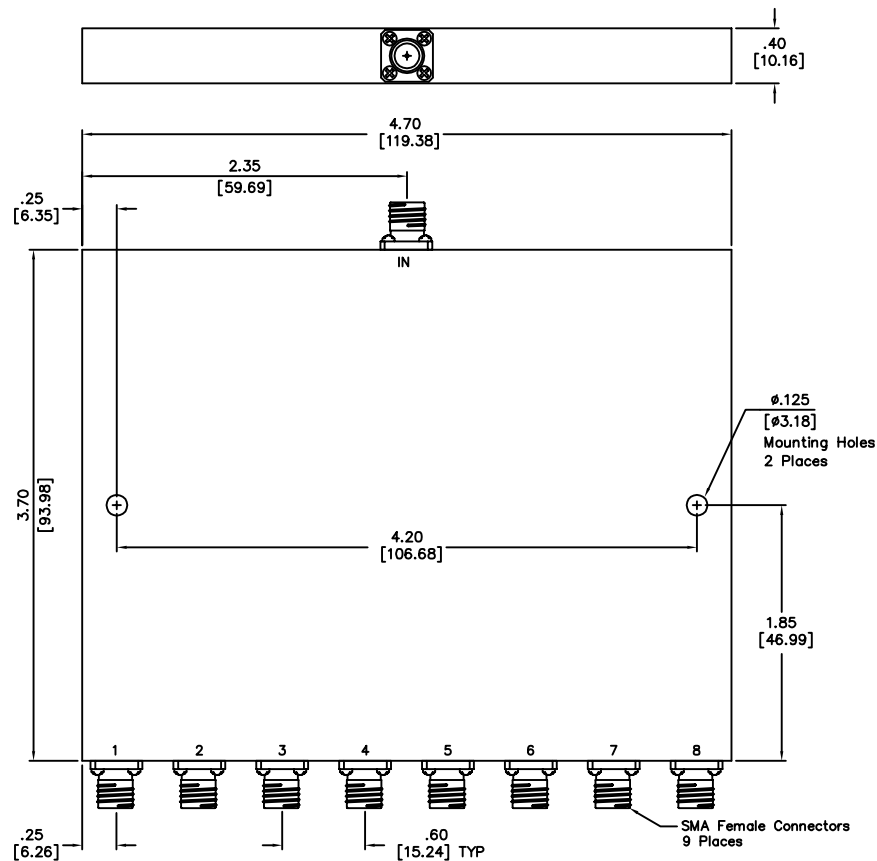

Electrical: Specifications:

Frequency Range:	2.0 - 21.0 GHz
Insertion Loss:	3.8 dB Max
Amplitude Balance:	1.2 dB Max
Isolation:	15 dB Min
Phase Balance:	15.0 deg. Max
VSWR Input:	2.00: 1 Max
VSWR Output:	2.00: 1 Max
Power dividing at input:	30 watts Max
Power rating is for load VSWR better than 1.20:1	

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470
Ph: 973-706-8475, Fax: 973-832-4435
www.sigatek.com

SP18858

8-way SMA Power Divider

Dimensions are in inches and (mm)
Decimal Tolerance:
2 place ± 0.020
3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.